


# FAST™

MICRO-SB




# CONTENTS

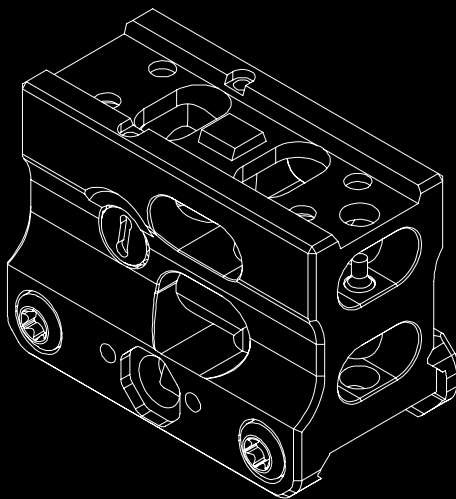

## PRODUCT OVERVIEW

The FAST™ Micro-SB is specifically designed for the Aimpoint® CompM5s, CompM5b and Duty RDS mini red dot sights and features a built-in, fully adjustable front and rear back-up iron sight. It puts these taller “micro” sights at a height of 2.26” and is fully compatible with the entire line of FAST™ FTC magnifier mounts. It comes standard with a 2 cross bolt rail clamp, but is compatible with the FAST™ QD Lever.

One (1) FAST™ Micro-SB



One (1) Rail Clamp



Two (2) Washers



Two (2) Clamp Screws



Four (4) Optic Mounting Screws



One (1) Short 5/64 L-key





**WARNING: ENSURE FIREARM IS UNLOADED**




**CAUTION:**

OVER-TORQUING FASTENERS CAN DAMAGE YOUR MOUNT AND/OR YOUR OPTIC AND WILL VOID YOUR WARRANTY. USING THREAD LOCKING COMPOUNDS, SUCH AS LOCTITE® OR OTHERS, IS NOT RECOMMENDED AND WILL VOID YOUR WARRANTY.


1

Using the UNITY™ supplied Optic Mounting Screws, install the optic to the mount. Tighten the screws in an “X” pattern until they are finger tight. Give each screw a 1/8 - 1/4 turn with the supplied torx key. **Do not exceed manufacturer's recommended torque spec.**

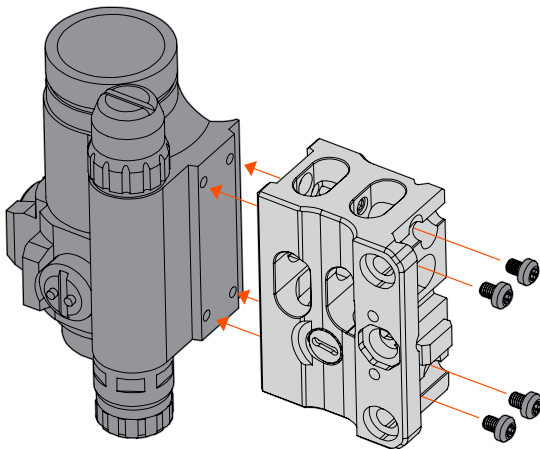


2

Place the FAST™ Micro-SB mount on the M1913 Rail in desired location. If using the included Rail Clamp, move to step 3. If using the optional FAST™ QD Lever (sold separately), jump to step 4.

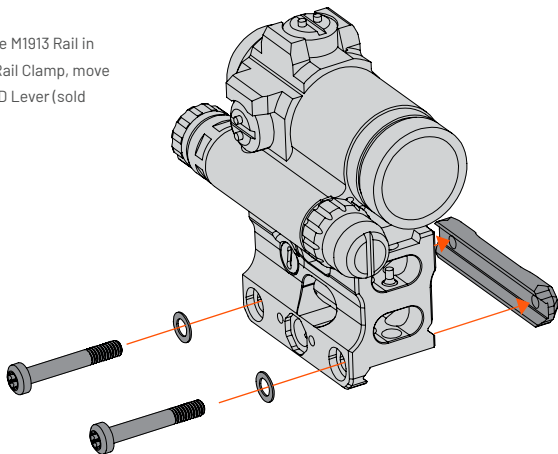

3

Insert each Clamp Screw through a Washer. Then insert them through the FAST™ Micro-SB mount and thread them into the Rail Clamp. Secure screws using a T25 bit driver. Lightly snug all screws before applying final torque to any. **Torque to 35 in-lbs (4 Nm).** Jump to step 5.

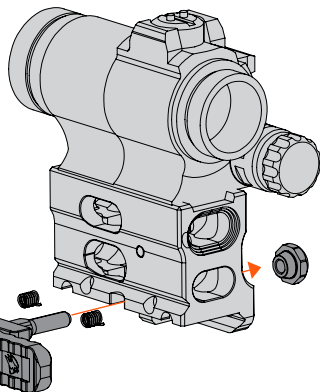


4

Optional FAST™ QD (Quick Detach) Lever (sold separately) can be installed in place of the Rail Clamp. Installation instructions are included with the lever.



## CAUTION:

ATTEMPTING TO DISASSEMBLE OR REMOVE THE REAR SIGHT ASSEMBLY IS NOT COVERED UNDER / WILL VOID WARRANTY.

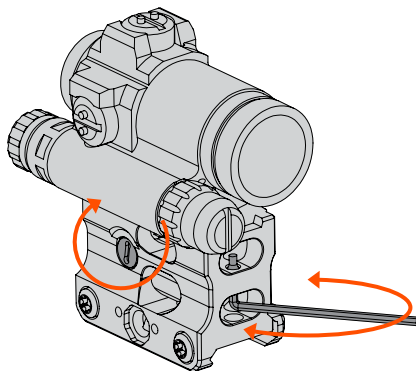

5

Windage adjustment of rear BUIS is 0.5 MOA/click (with a 12.5" Sight Radius). If in conjunction with included front BUIS, adjustment is 5 MOA/click. Windage adjustment can be made with Aimpoint® adjustment tools or flat blade screwdriver.

6

Elevation adjustment for front BUIS is 10 MOA per 1/8" turn (keep in mind this is a 1.27" Sight Radius). Elevation will be touchy as this sight is intended as a backup system for weapons that do not have a standard front sight requirement.



[INFO@UNITYTACTICAL.COM](mailto:INFO@UNITYTACTICAL.COM)

©2025 UNITY Tactical. All Rights Reserved.  
Specifications subject to change without notice. PAT. UTIP.CO

